


TMK UP™ QX TORQ

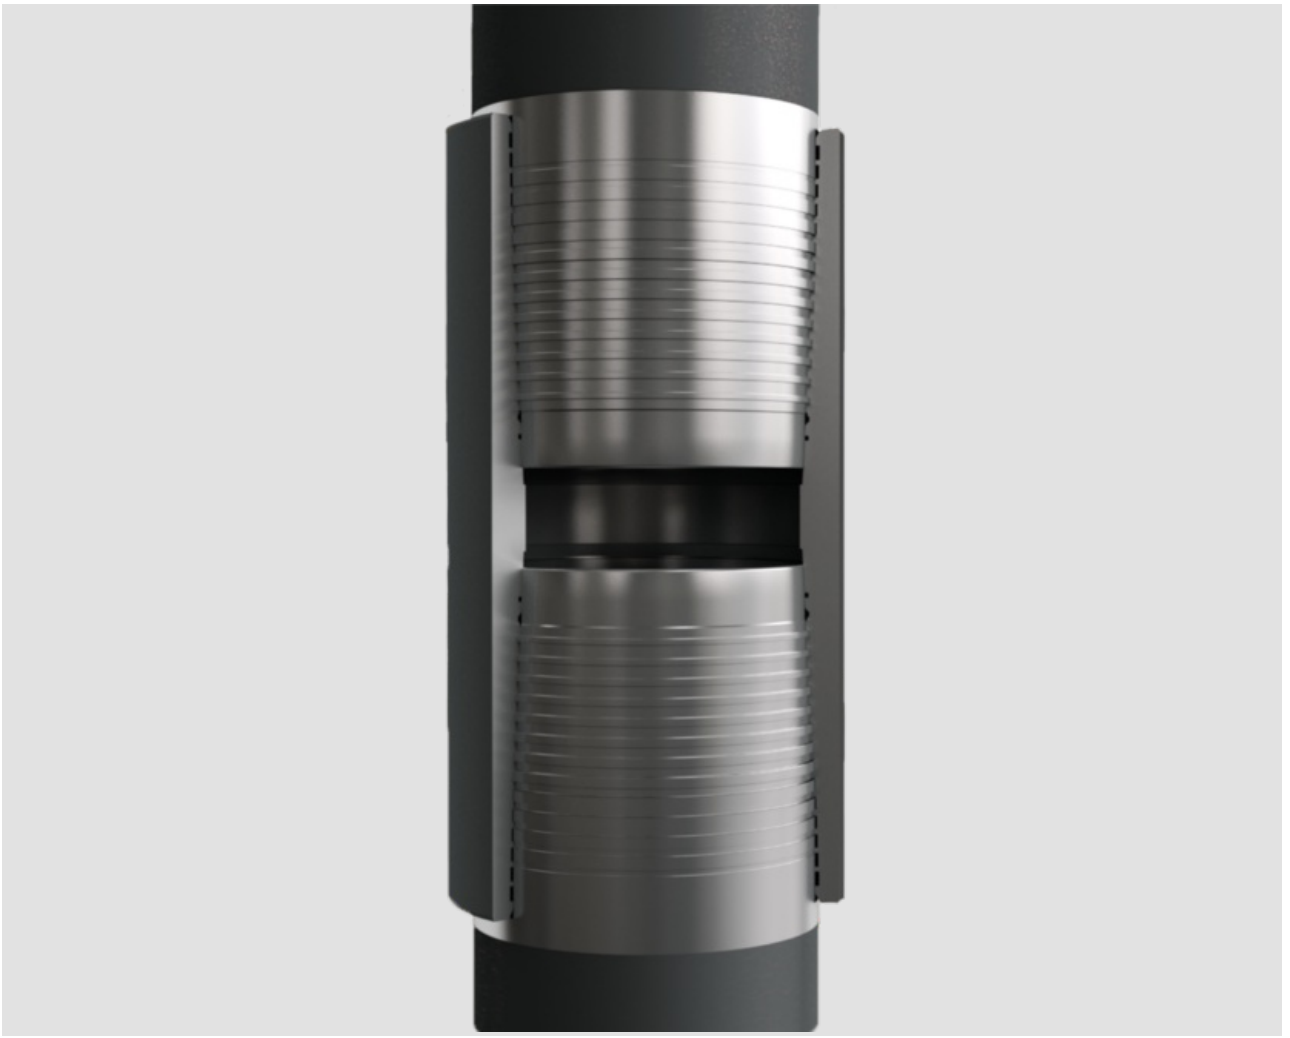

TMK UPTM QX TORQ

TORQ SERIES

Range: 4 1/2" - 13 5/8" mm

Applications

- Extreme Torque
- Production Casing
- Production Tubing
- Intermediate Casing
- Liners and Tie-Backs
- Rotating during Installation
- Rotating while Cementing
- HPHT

Dovetail Threads

- Increased tension and compression efficiency
- High bending capacity and evenly distributed stresses
- Extreme torque capacity

Sphere and Sphere Metal-to-Metal Seal

- Exceptional sealability for fracking and gas or liquid production
- Extraordinary performance under combined loading
- Sealability validated using stringent Cal IV testing

Run-Out Threads

- Maximizes critical cross-sectional area